

HSM V-Press 860



HSM V-Press 860 vertical baling press

With a pressing power of 594 kN and employing low-noise and energy-saving technology, the HSM V-Press 860 is the most economical and ecological solution for your waste disposal.

Technical data

| | | | |
|--|-------------------------|--|--|
| Order number: | 6048204 | Bale length x Bale width x Bale height: | 1200 x 1200 x 780 mm |
| EAN | 4026631079006 | Bale weight: | 480 kg |
| Pressing power: | 594 kN | Method of loading: | manual |
| Specific pressing power: | 63,46 N/cm ² | Noise level (idle operation): | ca. 65 dB(A) |
| Driving power: | 4 kW | Width x Depth x Height: | 1800 x 1253 x 2990 mm |
| Voltage / Frequency: | 400 V / 50 Hz | Weight: | 2213 kg |
| Cycle time when idling vacío: | 25 s | Related product line: | V-Press |
| Volume throughput in idle operation (theor.): | 12 m ³ /h | Type of consumables: | Wire, Pre-looped wire |
| Loading height: | 1114 mm | Press material: | Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing, Big Bags, Polystyrene |
| Loading aperture width x height: | 1195 x 645 mm | | |

Product information



To fill the press, the upper half of the doors is pushed down and automatically opens after the compression process



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Suitable for cardboard as well as film



Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.



Economical

Optimised bale dimensions and bale weights for efficient storage, transport and direct commercialisation.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

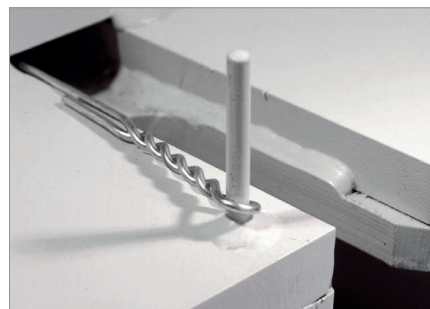

Strapping

Strapping with wire - optional tape station available for strapping with polyester tape or wire according to requirements.



www.tuev-sued.de/ps-zert



www.hsm.eu

HSM®