




HSM V-Press 860 P

HSM V-Press 860 P vertical baling press

Technical data

Order number:	6048714	Bale length x Bale width x Bale height:	1200 x 1200 x 780 mm
EAN	4026631080002	Bale weight:	230 kg
Pressing power:	434 kN	Method of loading:	manual
Specific pressing power:	46,37 N/cm ²	Width x Depth x Height:	1870 x 1273 x 2985 mm
Driving power:	4 kW	Weight:	2290 kg
Voltage / Frequency:	400 V / 50 Hz	Related product line:	V-Press
Cycle time when idling vacío:	25 s	Type of consumables:	Wire, Pre-looped wire
Volume throughput in idle operation (theor.):	12 m ³ /h	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing, Big Bags, HDPE / LDPE hollow containers & plastic bottles, Polystyrene, PET, Beverages and aluminum cans
Loading height:	1115 mm		
Loading aperture width x height:	1195 x 650 mm		

Product information



Reinforced press chamber and hydraulic door lock - Convenient opening and closing, no manual effort required



Robust mechanical bale ejector chain



Double quantity of retaining claws optimize the compression of the pressing material and reduce the number of loading actions

HSM®



Optimized pressing

Massive press ram and extremely robust press plate guidance.



Automatic start

Automatic start of the pressing process after closing the door.




Economical, fast and silent

The HSM V-Presses are highly energy efficient thanks to the specially developed rapid stroke technology. This saves time and money.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.

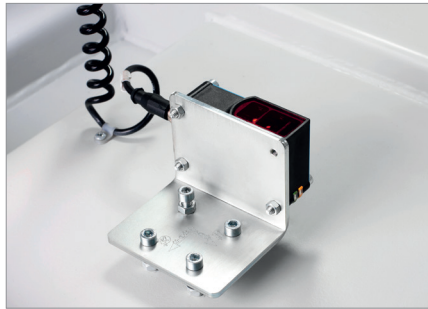

HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

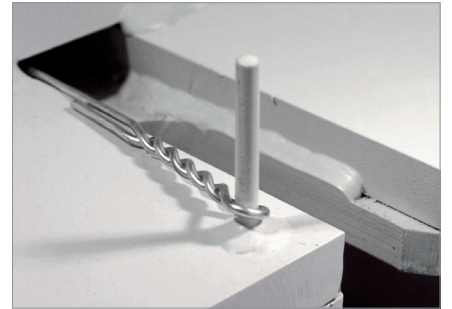

Strapping

Manual bale strapping with wire.



Made in Germany



cost effective



simple operation



95% volume reduction



quiet operation



www.tuev-sued.de/ps-zert



www.hsm.eu

HSM®