



# HSM V-Press 860 L

## HSM V-Press 860 L vertical baling press

The HSM V-Press 860 L produces bales with a recess for easy transport without pallets.

### Technical data

<b>Order number:</b>	6048617	<b>Bale length x Bale width x Bale height:</b>	1200 x 1200 x 780 mm
<b>EAN</b>	4026631080033	<b>Bale weight:</b>	460 kg
<b>Pressing power:</b>	594 kN	<b>Method of loading:</b>	manual
<b>Specific pressing power:</b>	63,46 N/cm <sup>2</sup>	<b>Width x Depth x Height:</b>	1797 x 1247 x 2985 mm
<b>Driving power:</b>	4 kW	<b>Weight:</b>	1950 kg
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Related product line:</b>	V-Press
<b>Cycle time when idling vacío:</b>	25 s	<b>Type of consumables:</b>	Wire, Pre-looped wire
<b>Volume throughput in idle operation (theor.):</b>	26,25 m <sup>3</sup> /h	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Punch waste/residue
<b>Loading height:</b>	1110 mm		
<b>Loading aperture width x height:</b>	1195 x 650 mm		

### Product information



Special profiles in the bale ejection door in the filling hatch and in the press ram form recesses in the bales



To fill the press, the upper half of the doors is swung to the right



Hydraulic door lock - Convenient opening and closing, no manual effort required



### Compresses cardboard and film

Suitable for cardboard as well as film.



### Automatic start

Automatic start of the pressing process after closing the door.



### Economical, fast and silent

The HSM V-Presses are highly energy efficient thanks to the specially developed rapid stroke technology. This saves time and money.




### Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.




### HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

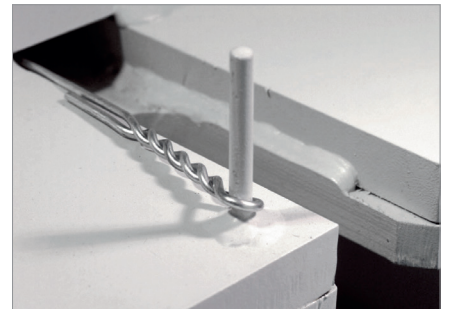

### Strapping

Strapping with wire – optional tape station available for strapping with polyester tape or wire according to requirements.



[www.tuev-sued.de/ps-zert](http://www.tuev-sued.de/ps-zert)



[www.hsm.eu](http://www.hsm.eu)

**HSM®**