

# HSM VK 807 V



## Channel baling press HSM VK 807 V

For industrial applications with small material loads - Troughput up to approx. 28 m<sup>3</sup>/h


### Technical data

<b>Order number:</b>	6616000	<b>Loading aperture width x Loading aperture length:</b>	450 x 710 mm
<b>Pressing power:</b>	82 kN	<b>Bale width x Bale height x Bale length:</b>	500 x 500 x 400-800 mm
<b>Specific pressing power:</b>	32,8 N/cm <sup>2</sup>	<b>Length x Width x Height:</b>	4813 x 1188 x 2281 mm
<b>Driving power:</b>	4 kW	<b>Weight:</b>	2,35 t
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Wire
<b>Cycle time when idling vacío:</b>	23,2 s	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard
<b>Volume throughput in idle operation (theor.):</b>	28 m <sup>3</sup> /h		
<b>Volume throughput at 50kg/m<sup>3</sup> (theor.):</b>	1.4 t/h		

### Product information



Particularly suitable for cardboard, films and bleeds of paper



Fully automatic vertical strapping with wire




Available as an option with manual strapping



### System solution

Integration into automated industrial production processes.

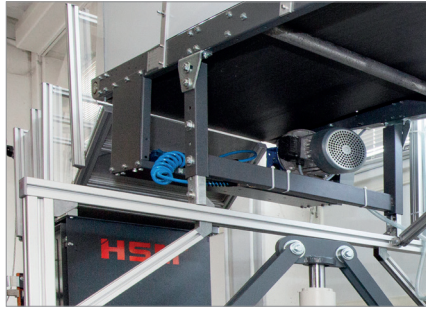

### Continuous loading

Suitable for continuous loading with conveyor belt, air feeding or similar.



### Compact bales

The bales can be stacked and are easy to transport.



### Automatic operation

Control of the pressing process via light barrier.



### Operating side

Can be fully integrated into existing workflows and processes. Operating side can be selected.



### Sturdy design

Very low space requirement thanks to compact and sturdy design.

