



# HSM DuoShredder 5750 - 4,6 x 34 mm

## HSM DuoShredder 5750

Zweistufige, vollautomatische Aktenentsorgungsanlage. Je nach Materialart kann eine praktische Durchsatzmenge von bis zu 800 kg/h erreicht werden. In Kombination mit einer HSM Ballenpresse wird der HSM DuoShredder 5750 zur vollständigen Entsorgungsanlage.

### Technical data

<b>Order number:</b>	1678001	<b>Intake width:</b>	500 mm
<b>Cutting type:</b>	particle cut	<b>Shredder material:</b>	Paper, Staples and paper clips, Credit card, Folders
<b>Cutting size:</b>	4,6 x 34 mm		
<b>Security level (DIN 66399):</b>	E-3   F-1   O-3   P-4   T-4		

### Product information




Two-stage fully automated shredding system.



Stage 1: pre-shredding using a four-shaft system consisting of two intake shafts and two cutting shafts.



Stage 2: fine shredding using a two-shaft system.

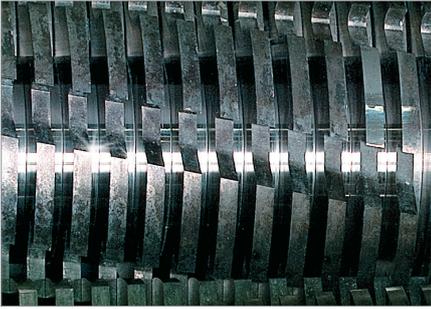

### Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant and guarantee durability.



### Continuous operation

Powerful drive allows continuous operation.



### Compression into boxes or waste bag

The shredded material which has been compressed into compact bales can be cleanly disposed of either in a box (HSM SP 4040 V) or a waste bag (HSM SP 4040 V, HSM SP 5080). These prevent particles from falling out and ensure clean handling.



### Bale weight can be manually set

The bale weight is variable and depends on your requirement (HSM SP 5080, HSM SP 5088).



### User safety through emergency off switch

It may be necessary to stop the machine immediately so we have equipped the device with an emergency off switch.



### Dust extractor

The powerful and energy efficient dust extractor HSM DE 4-100 in dust classification M ensures an optimal extraction due to the high air flow volume, thereby reducing dust emissions (accessory).



\*HSM Powerline SP 5080 / SP 5088

