



# HSM TriShredder 6060 - 4.6 x 34 mm

## HSM TriShredder 6060

HSM TriShredder 6060 3-stage shredding unit with three cutting units and a throughput of up to 2500 kg/h at security level P-3. In combination with a baling press, you can expand the HSM TriShredder 6060 into a complete disposal system.

## Technical data

|                                    |                             |                           |  |
|------------------------------------|-----------------------------|---------------------------|--|
| <b>Order number:</b>               | 1560001                     | <b>Intake width:</b>      | 650 mm   |
| <b>Cutting type:</b>               | particle cut                | <b>Shredder material:</b> | Paper, Staples and paper clips, Credit card, Folders |
| <b>Cutting size:</b>               | 4,6 x 34 mm                 |                           |  |
| <b>Security level (DIN 66399):</b> | E-3   F-1   O-3   P-4   T-4 |                           |  |

## Product information




Three-stage fully automated shredding system.



Stage 1: pre-shredding using a four-shaft system consisting of two intake shafts and two cutting shafts.



Stages 2 and 3: fine shredding using a two-shaft system.

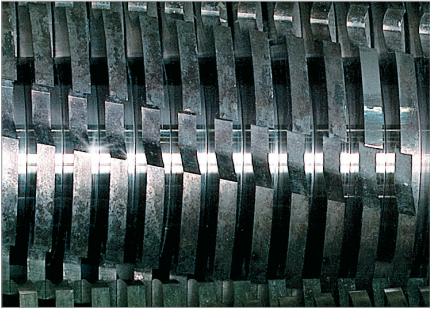


### Specially hardened solid steel cutting rollers

The induction-hardened solid steel cutting rollers are wear-resistant and guarantee durability.



### Continuous operation

Powerful drive allows continuous operation.

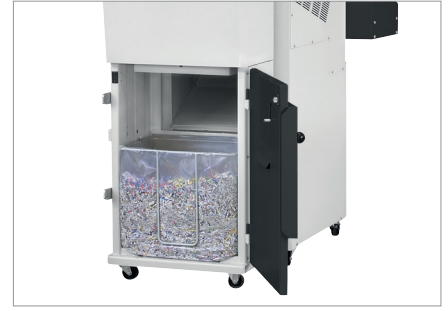

### Compression into boxes or waste bag

The shredded material which has been compressed into compact bales can be cleanly disposed of either in a box (HSM SP 4040 V) or a waste bag (HSM SP 4040 V, HSM SP 5080). These prevent particles from falling out and ensure clean handling.



### Bale weight can be manually set

The bale weight is variable and depends on your requirement (HSM SP 5080, HSM SP 5088).



### User safety through emergency off switch

It may be necessary to stop the machine immediately so we have equipped the device with an emergency off switch.



### Dust extractor

The powerful and energy efficient dust extractor HSM DE 4-100 in dust classification M ensures an optimal extraction due to the high air flow volume, thereby reducing dust emissions (accessory).



\*HSM Powerline SP 5080 / SP 5088

