



## HSM VK 2306

### Channel baling press HSM VK 2306

For industrial applications with small material loads - Troughput up to approx. 121 m<sup>3</sup>/h

#### Technical data

<b>Order number:</b>	6651002	<b>Loading aperture width x Loading aperture length:</b>	670 x 600 mm
<b>Pressing power:</b>	240 kN	<b>Bale width x Bale height x Bale length:</b>	750 x 500 x 600-1200 mm
<b>Specific pressing power:</b>	64 N/cm <sup>2</sup>	<b>Length x Width x Height:</b>	5295 x 2863 x 1565 mm
<b>Driving power:</b>	15 kW	<b>Weight:</b>	3,5 t
<b>Voltage / Frequency:</b>	400 V / 50 Hz	<b>Type of consumables:</b>	Wire
<b>Cycle time when idling vacío:</b>	6,7 s	<b>Press material:</b>	Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET beverage and aluminium cans, soft packaging, PET
<b>Volume throughput in idle operation (theor.):</b>	121 m <sup>3</sup> /h		
<b>Volume throughput at 50kg/m<sup>3</sup> (theor.):</b>	6.05 t/h		


#### Product information



Compresses paper, cardboard, plastic film and PET bottles



Particularly suitable for PET compaction and for special applications




Available as an option with manual strapping



### System solution

Integration into automated industrial production processes.

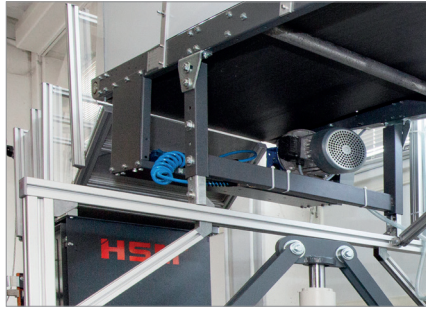

### Continuous loading

Suitable for continuous loading with conveyor belt, air feeding or similar.



### Compact bales

The bales can be stacked and are easy to transport.



### Automatic operation

Control of the pressing process via light barrier.



### Operating side

Can be fully integrated into existing workflows and processes. Operating side can be selected.



### Sturdy design

Very low space requirement thanks to compact and sturdy design.

