

## HSM VK 2306



For industrial applications with small material loads - Troughput up to approx. 121 m<sup>3</sup>/h

### Technical data

|                      |              |                                       |              |
|----------------------|--------------|---------------------------------------|--------------|
| <b>Order number:</b> | 6651002      | <b>Pressing power<sup>2</sup>:</b>    | 240 kn       |
| <b>Bale weight:</b>  | 140 x 250 kg | <b>Bale size (LxWxH)<sup>2</sup>:</b> | 750 x 500 mm |
| <b>Strapping:</b>    | 3            |                                       |              |

### Product Information:



Particularly suitable for PET compaction and for special applications



Suitable for continuous loading with conveyor belt, air feeding or similar



Very low space requirement thanks to compact and sturdy design


## Product Information:



Operating side can be selected



Integration into automated industrial production processes

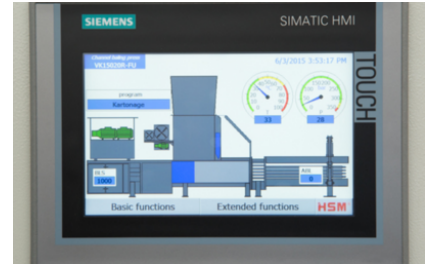

Control of the pressing process via light barrier



Available as an option with manual strapping



Compresses paper, cardboard, plastic film and PET bottles

