

## HSM VK 4812



For industrial applications with small material loads - Troughput up to approx. 332 m<sup>3</sup>/h

### Technical data

|                      |              |                                       |               |
|----------------------|--------------|---------------------------------------|---------------|
| <b>Order number:</b> | 6649002      | <b>Pressing power<sup>2</sup>:</b>    | 480 kn        |
| <b>Bale weight:</b>  | 300 x 450 kg | <b>Bale size (LxWxH)<sup>2</sup>:</b> | 1100 x 750 mm |
| <b>Strapping:</b>    | 4            |                                       |               |

### Product Information:



Can be fully integrated into existing workflows and processes. Operating side can be selected



Integration into automated industrial production processes




Suitable for continuous loading with conveyor belt, air feeding or similar

## Product Information:




High compression and bale weights

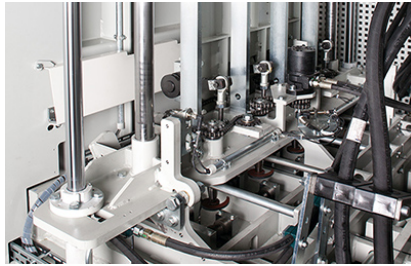

Fully automatic vertical strapping



Particularly suitable for compression of cardboard and plastic film

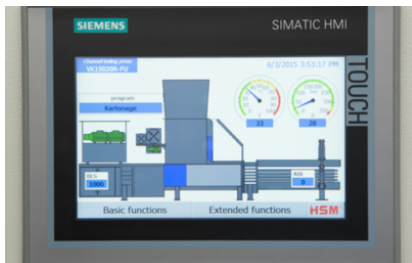

Control of the pressing process via light barrier



Versatile solution for materials up to approx. 60 kg /m³ bulk weight



Suitable for almost all requirements. Contact us if you have other materials or applications. We will find you a suitable solution.

