

## HSM VK 1206

For industrial applications with small material loads - Troughput up to approx. 99 m<sup>3</sup>/h



### Technical data

<b>Order number:</b>	6618001	<b>Pressing power<sup>2</sup>:</b>	159 kn
<b>Bale weight:</b>	100 x 200 kg	<b>Bale size (LxWxH)<sup>2</sup>:</b>	750 x 500 mm
<b>Strapping:</b>	3		

### Product Information:



Optimal for connecting to air feeding systems (fast cycle times)



Suitable for continuous loading with conveyor belt, air feeding or similar



Operating side can be selected

## Product Information:




Very low space requirement thanks to compact and sturdy design



Integration into automated industrial production processes



Particularly suitable for cardboard, plastic film and PET bottles

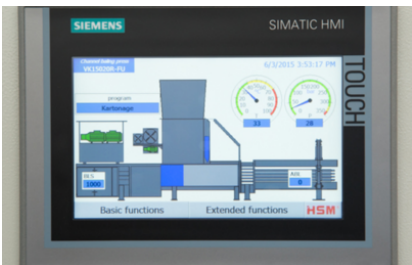

Control of the pressing process via light barrier



Available as an option with manual strapping

