

HSM V-Press 605

The space-saving vertical baling press with a wide-opening double door reliably and economically reduces the volume of cardboard, die-cut waste, paper or film. The pressing process starts immediately after closing the door. Bale ejection is automatic. High-performance product variant for three-phase connection

Technical data

Order number:	6112164	Pressing power:	57 kN
Maximum bale weight:	70 kg	Bale size (WxHxL):	600 x 600 x 800 mm
Loading aperture (WxH):	800 x 495 mm	Number of strappings:	3
Type of consumables:	strapping tape	Motor:	1,5 kW
Voltage / Frequency:	400 V / 50 Hz	Cycle time:	21 s
Dimensions of machine (WxDxH):	1198 x 823 x 1986 mm	Machine weight:	485 kg

Product Information:



The powerful system is designed as Plug&Press and can be put into operation immediately at the installation site



To fill the press, the upper half of the doors is swung to the right



Special retaining claws optimize the compression of the pressing material.



Automatic start of the pressing process after closing the door




Convenient membrane keypad with text display, which shows the current status of the machine




Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Massive press ram and extremely robust press plate guidance

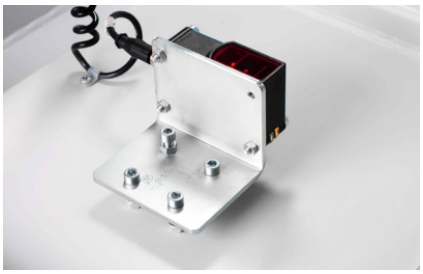

HSM TCS (Torsion Control System) for monitoring press ram movement

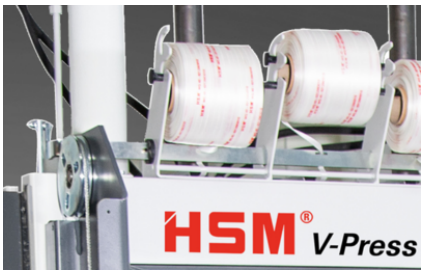

Manual bale strapping with continuous polyester tape



Suitable for cardboard as well as film

Made in Germany | quiet operation | reliable | simple operation | 95% volume reduction

www.hsm.eu