

HSM V-Press 860



HSM V-Press 860 vertical baling press

With a pressing power of 594 kN and employing low-noise and energy-saving technology, the HSM V-Press 860 is the most economical and ecological solution for your waste disposal.

Technical data

Order number:	6048114	Bale length x Bale width x Bale height:	1200 x 1200 x 780 mm
EAN	4026631079884	Bale weight:	480 kg
Pressing power:	594 kN	Method of loading:	manual
Specific pressing power:	63,46 N/cm ²	Noise level (idle operation):	ca. 65 dB(A)
Driving power:	4 kW	Width x Depth x Height:	1797 x 1070 x 2985 mm
Voltage / Frequency:	400 V / 50 Hz	Weight:	1900 kg
Cycle time when idling vacío:	25 s	Related product line:	V-Press
Volume throughput in idle operation (theor.):	12 m ³ /h	Type of consumables:	Wire, Pre-looped wire
Loading height:	1110 mm	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, Clothing, Big Bags, Polystyrene
Loading aperture width x height:	1195 x 650 mm		

Product information



To fill the press, the upper half of the doors is swung to the right



Hand wheel door lock - Easy to handle thanks to counter-rotating thread for quick opening and closing



Suitable for cardboard as well as film

HSM®



Compresses cardboard and film

Suitable for cardboard as well as film.



Automatic start

Automatic start of the pressing process after closing the door.



Economical

Optimised bale dimensions and bale weights for efficient storage, transport and direct commercialisation.




Graphic-capable display

Convenient membrane keypad with text display, which shows the current status of the machine.



HSM TCS

HSM TCS (TorsionControlSystem) for monitoring press ram movement.

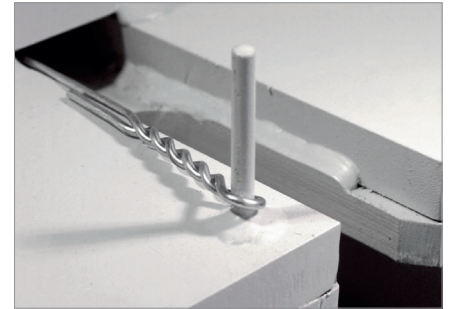

Strapping

Strapping with wire - optional tape station available for strapping with polyester tape or wire according to requirements.



www.tuev-sued.de/ps-zert

www.hsm.eu

HSM®