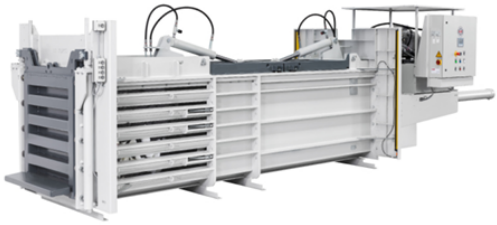

HSM HL 3521 T

The model HSM HL 3521 T can be filled via conveyor and is especially designed to compact tyres. Of course, other packaging materials can also be compressed.

Technical data

Order number:	6270000	Pressing power:	320 kN
Maximum bale weight:	850 kg	Bale size (WxHxL):	800 x 1000 x var. 1200 mm
Loading aperture (WxH):	800 x 2100 mm	Number of strappings:	5
Type of consumables:	strapping wire	Motor:	22 kW
Voltage / Frequency:	400 V / 50 Hz	Cycle time:	44 s
Dimensions of machine (WxDxH):	8100 x 1660 x 2485 mm	Machine weight:	8100 kg

Product Information:

Multilingual operational guidance and Stored-program controller PLC

Hydraulic counterplate for bale removal ensures optimum operating convenience and safety

Hydraulic loading flap for maximum operating comfort

Manual bale strapping with continuous polyester tape. HL 3521 S optionally also with eyelet wire or tape.

Automatic information as soon as enough material for a bale has been compressed and the bale can be tied

Suitable for continuous loading with conveyor belt or similar

Specially designed to compact tyres

The unique design and controllable positioning of the press ram allows for easy cleaning and servicing

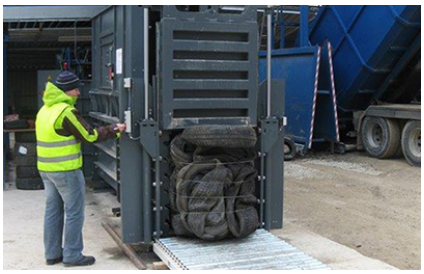

Safeguarding of the operating area with protective grid for maximum operator safety

www.hsm.eu